


All filter capacitors must be NPO/COG type, rated for at least 100V !!!!
 Use only original Micrometals/Amidon Toroid cores !!!
 Relays are THT, however: You can use e.g. IM43GR and straighten pins = cheaper than THT Version

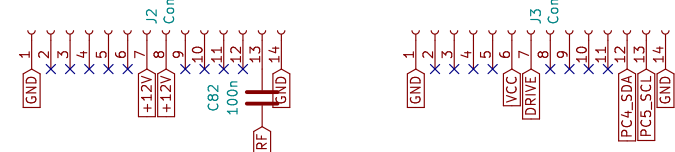

80-10m Idea and Basic circuit by PE1NNZ (c) DL2MAN / PE1NNZ - NON commercial use only !	
Sheet: / File: uSDX_Multiband_Rev3.sch	
Title: uSDX 8 Band Serial Resonance Multiband Board	
Size: A4	Date: 2020-12-23
KiCad E.D.A. kicad (5.1.6)-1	Rev: 3.1 Id: 1/1