
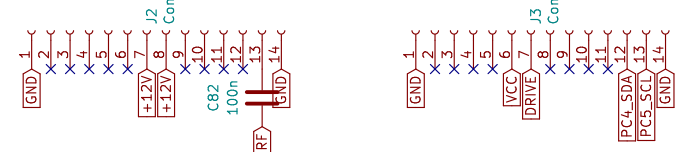


All filter capacitors must be NPO/COG type, rated for at least 100V !!!!
 Use only original Micrometals/Amidon Toroid cores !!!
 Relays are THT, however: You can use e.g. IM43GR and straighten pins = cheaper than THT Version



80-10m
 Idea and Basic circuit by PE1NNZ
 by DL2MAN

Sheet: /
 File: uSDX_Multiband_Rev3.sch

Title: uSDX 8 Band Serial Resonance Multiband Board

Size: A4 Date: 2021-08-17
 KiCad E.D.A. kicad (5.1.10)-1

Rev: 3.1
 Id: 1/1